



## Smart T Plus 15.6

249.79 mm



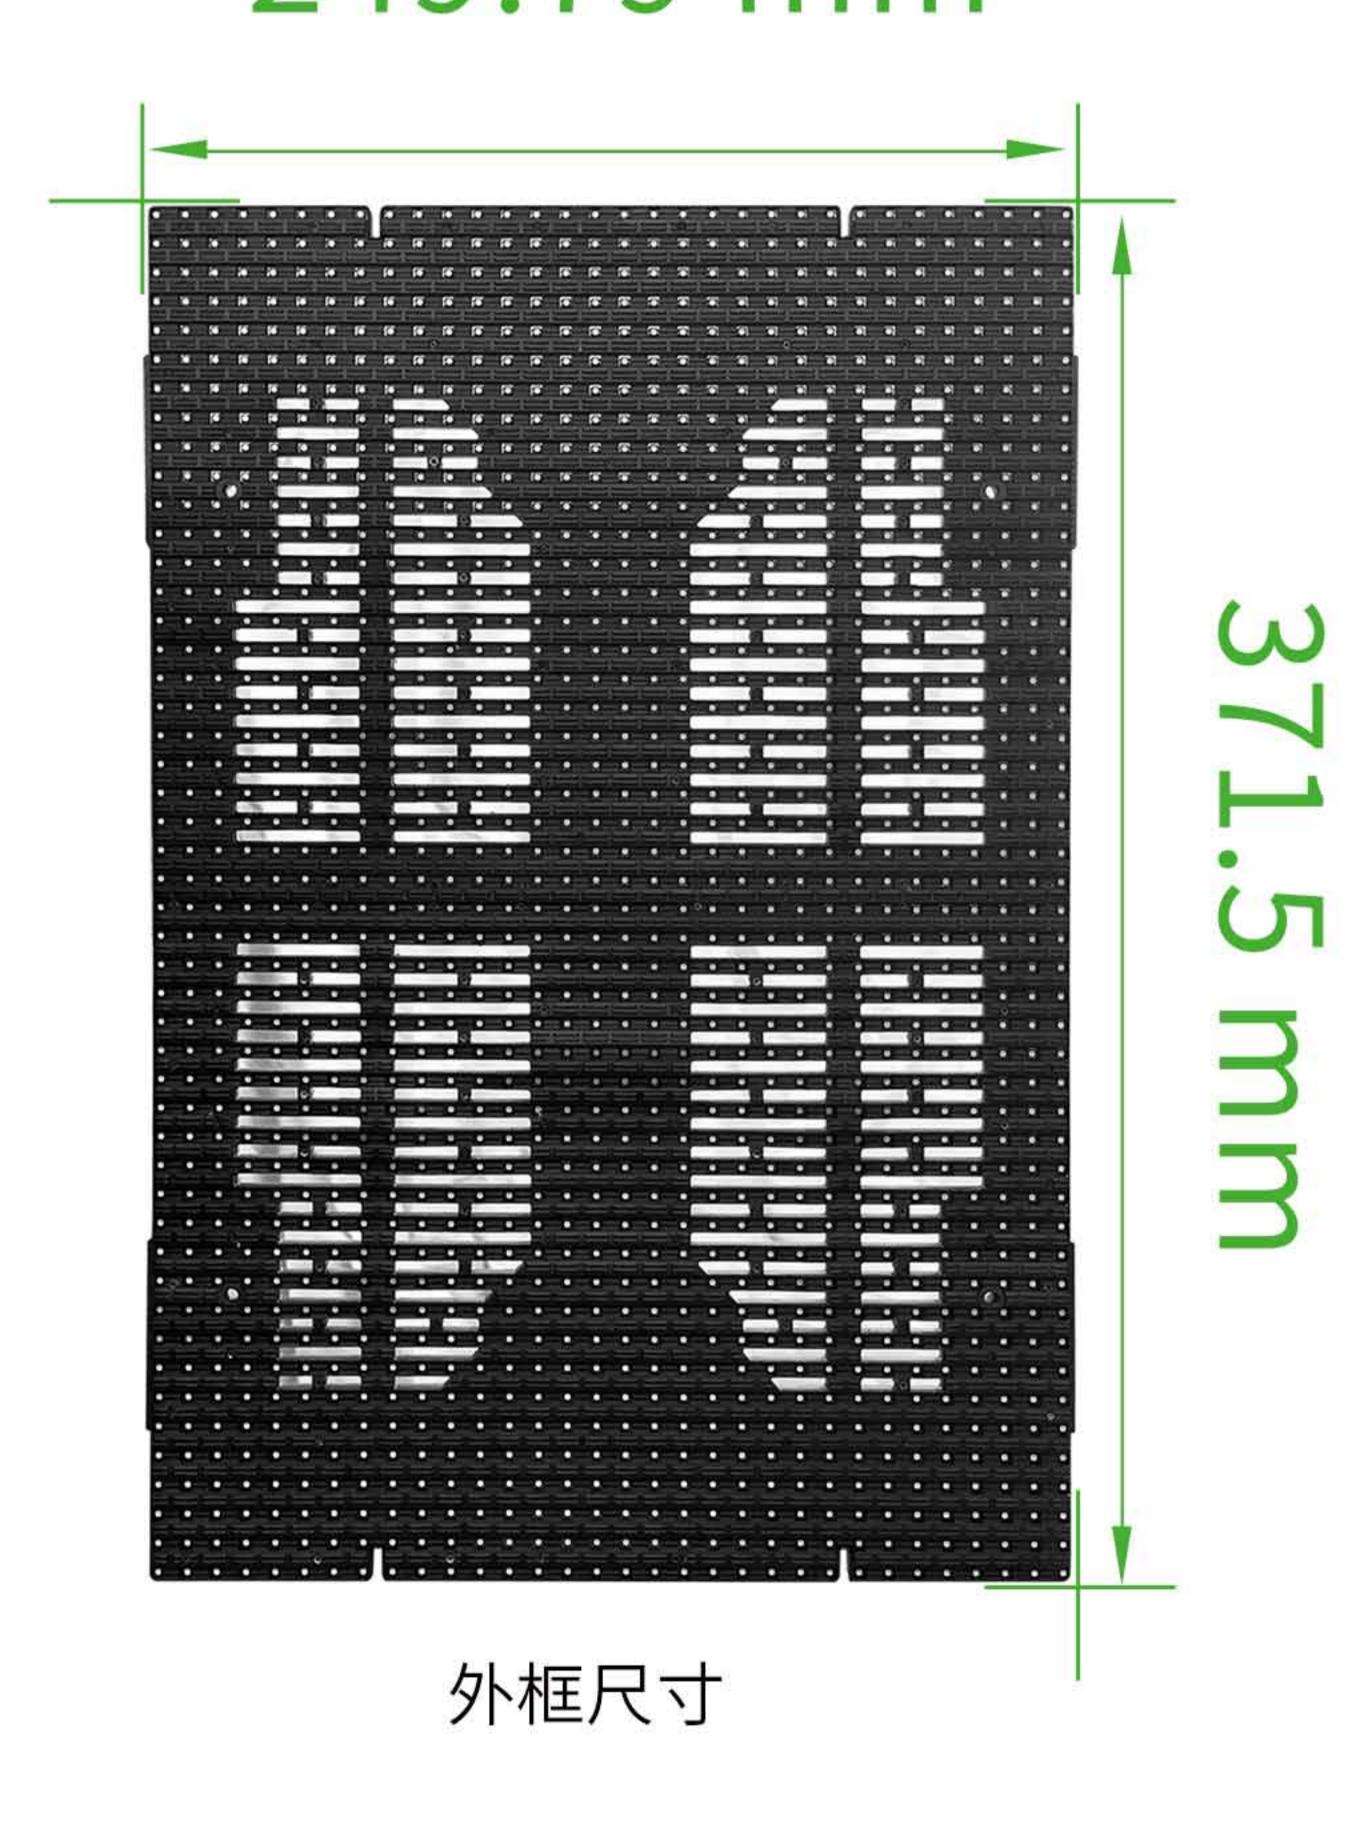

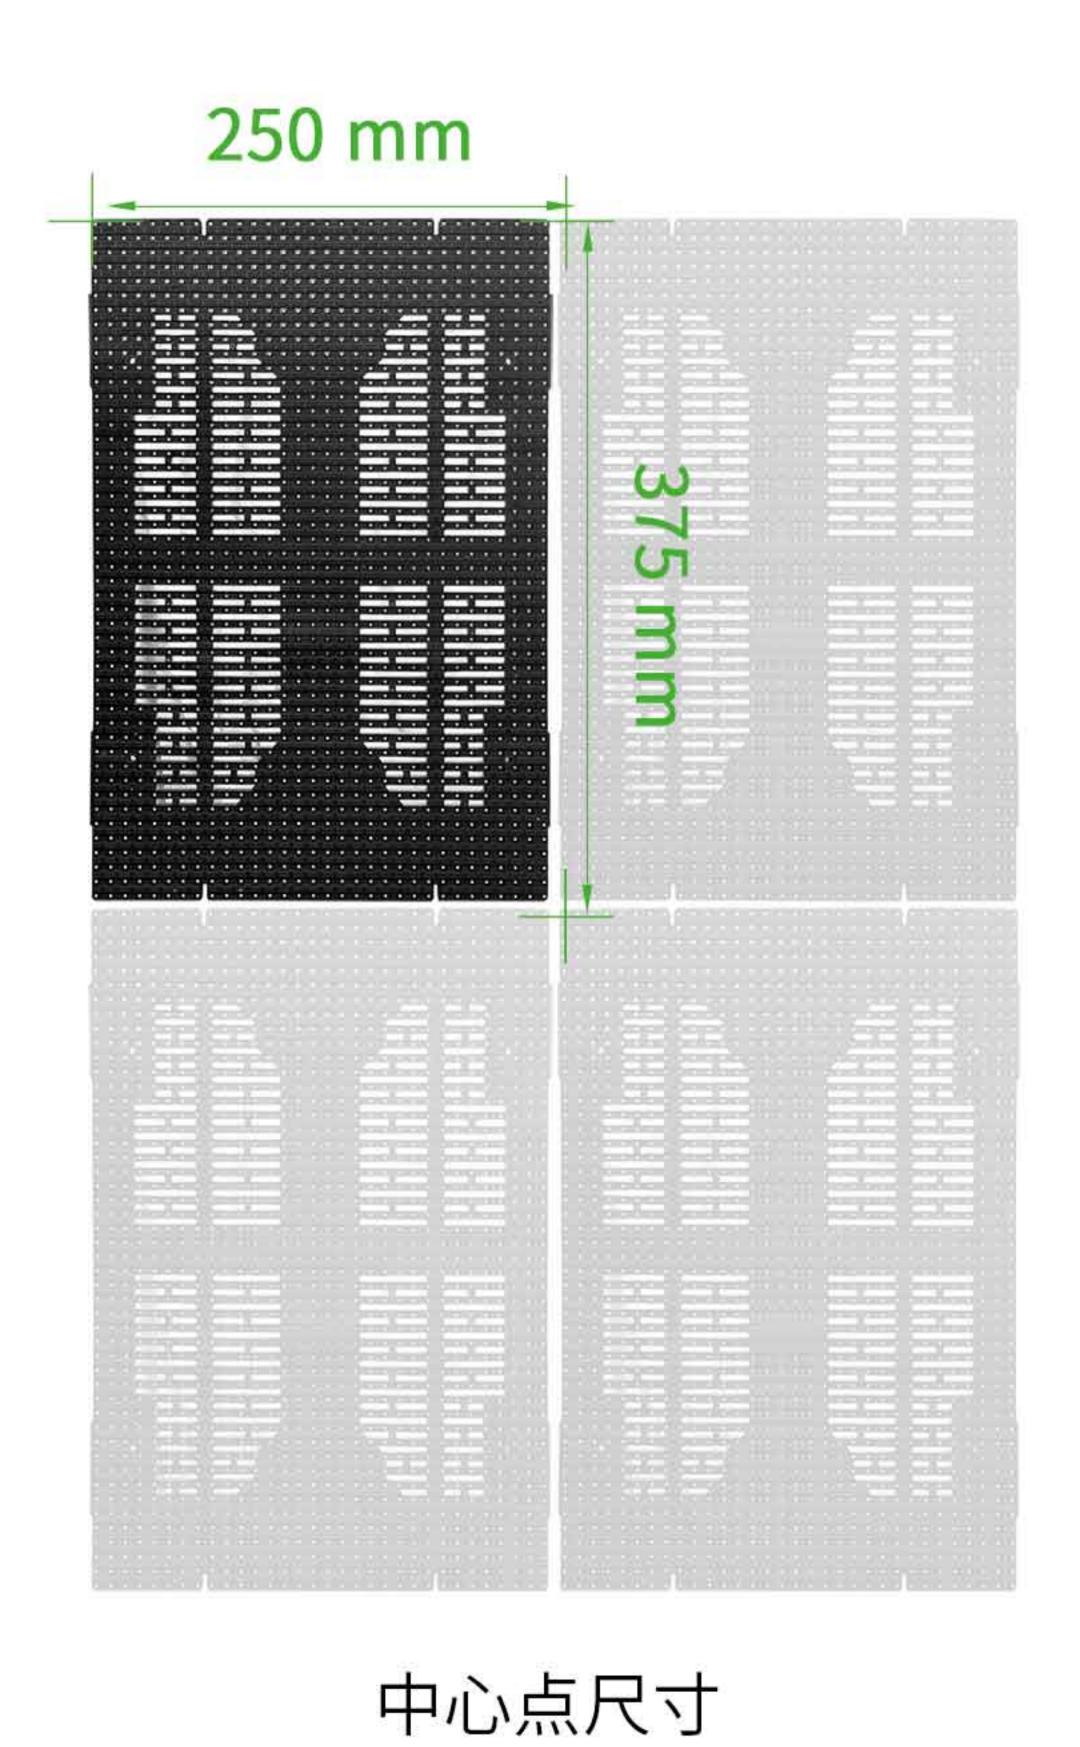

360° Trar	nspare	nt Foldable LED Screen
Application Environment		Outdoor
Model		Smart T Plus (Rental/Fix installation/Led floor)
Pixel Pitch	(mm)	15.6
IP Rating		IP65(Double-sided glue filling, actual IP68)
Transparent rate		14.25%
LED Type		SMD 2727
Pixel Density (p	oixel/m²)	4096
Driving Mode		1/2
Gray Scale	(bit)	16
Max Brightness(cooper wire led)	(nits)	1
Max Brightness(golden wire led)	(nits)	3500
Max Power Consumption (cooper wire led)	$(w/m^2)$	1
Max Refresh Rate	(Hz)	8000
Module Resolution	(pixels)	16 * 24
Module Size	(mm)	250*375
Module thickness	(mm)	18.5
Weight	(kg/m²)	13
Folding Angle		360°
Viewing Angle	(H/V)	120° / 120°
Output Voltage	(V)	DC24V/48V
Input Voltage	(V)	AC100 ~ AC240
Maximum load height of single control box	(m)	20m (Multiple steel wire load-bearing)
Best Viewing Distance	(m)	≥15
Brightness adjustment (digital)	(levels)	256
Brightness adjustment (analog current)	(levels)	64-256
Contrast		2500:1
Connection Type (Standard configu (Quick mainte	uration) enance)	2+14pin Soldering 50pin Connector
Short Circuit Protection		Yes
Quick Maintenance		Mechanical and electrical connections available
Controlling Mode		Synchronous/Asynchronous
Installation Method		Haning / mounting / fixing / Led floor
Operation temperature	(C°)	-40 ~ 65
Operation humidity	(RH)	0% ~ 90%
Certificate		EUVROCIONARIO FO CE CO

